



Type KS 15

basic @ level

Conductive one-staff-level probe with welding sleeve system and modular process connection

Advanced Features

- ▶ Welding sleeve system with modular process connection
- ▶ Aseptic measuring point possible
- ▶ Electrodes free cuttable
- ▶ Wettingparts made of high-grade steel
Material No. 1.4404
- ▶ FDA, EHEDG-conformal

Technical features


- ▶ Electrodes blank or coated
- ▶ Optional high-grade-steel connecting head
Material No. 1.4305
- ▶ Optional deliverable with level module
- ▶ With connecting head optional connections:
 - Screw joint
 - M12 plug
- ▶ Without connecting head optional connections:
 - M12 plug
 - hard coded cable
- ▶ Thread G 1/2 " elastomerfree sealing system
- ▶ Safety class IP69K
- ▶ CiP/SiP Cleaning 140°C, 30 min.
- ▶ ambient temperature: -10...60°C
- ▶ permissible media temperature: 0...100°C
- ▶ staff length 2mtr. max.



Favoured fields of application are e.g.:

- ▶ Low- / high alarm in containers
- ▶ Media registration in pipes as pump protection
- ▶ Container filling / deflation with level control

M12 Plug

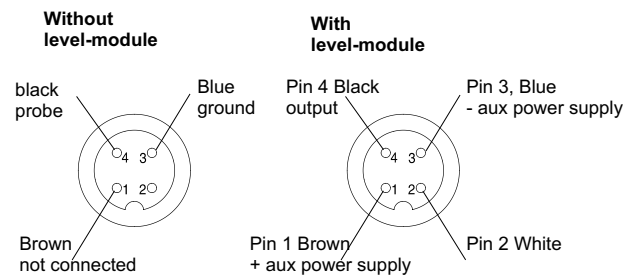

Order Code

KS 15

| | | | | |
|--|---|---|------|------|
| High-grade steel connecting head | | | | |
| With connecting head and with screw joint | 0 | 5 | | |
| With connecting head and with M12-plug | 0 | 6 | | |
| Without connecting head with M12-plug | 1 | 1 | | |
| Without connecting head with hard coded cable (X = Length in Metres, standard 2 mtr.) | 1 | X | | |
| Probe length | | | | |
| probe length (X = length in mm) | | | X | |
| Preference type | | | 200 | |
| Preference type | | | 500 | |
| Preference type | | | 1000 | |
| Type of electrode | | | | |
| blank staff | | | | A |
| coated staff | | | | B |
| Level modul | | | | |
| optional with integrated level modul | | | | SNKM |

12/2009