



Type KS 35

basic @ level

Conductive more-staff-level probe with welding sleeve system and modular process connection

advanced features


- ▶ Welding sleeve system with modular process connection
- ▶ Aseptic measuring point possible
- ▶ Elektrodes free cuttable
- ▶ Wetting parts made of high grade steel material No. 1.4404
- ▶ FDA, EHEDG-conformal

technical features


- ▶ Elektrodes blank or coated
- ▶ Optional high-grade-steel connecting head material No. 1.4305
- ▶ Optional deliverable with level modul
- ▶ With connecting head optional connections:
 - Screw joint
 - M12 plug
- ▶ Without connecting head optional connections:
 - M12 plug
 - hard coded cable
- ▶ Thread G 1" elastomerfree sealing system
- ▶ Safety class IP69K
- ▶ CiP/SiP Cleaning 140°C, 30 min.
- ▶ ambient temperature: -10...60°C
- ▶ permissible media temperature: 0...100°C
- ▶ staff length 2mtr. max.



topview KS 35

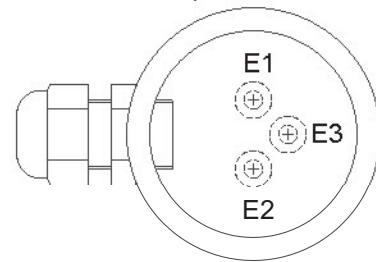

M12 plug



Favoured fields of application are e.g.:

- ▶ Low- / high alarm in containers
- ▶ Media registration in pipes as pump protection
- ▶ Container filling / deflation with level control

Order code

KS 35 - [] - [] - [] - []

High-grade-steel connection head		[]	[]	[]	[]
With connecting head and with screw joint		0	5		
With connecting head and with M12-plug		0	6		
Without connecting head and with M12-plug		1	1		
Without connecting head with hard coded cable (X = Length in meters, standard 2 mtr.)		1	X		
Probe length					
Probe length staff 1 (X = Länge in mm)			X		
Probe length staff 2 (X = Länge in mm)				X	
Probe length staff 3 (X = Länge in mm)					X
Preference type		200	200	200	
Preference type		500	500	500	
Preference type		1000	1000	1000	
Type of electrode					
blank staff Ø 4 mm					A
coated staff Ø 4mm					B
blank staff Ø 8 mm					C
coated staff Ø 8mm					D