

## Type DES

### Advanced Features


#### Display extension set for devices of type series SLI04; STS01/02; STS03/04 SDT03

- For external place of the display and control unit in field applications
- Can be installed later
- All parts of the set are constructed in accordance with Hygienic design aspects are available in separate components



### Technical Features

- Housing Material High Grade Steel, 316L / 1.4404
- Inox Screwing M16x1,5 High Grade Steel 316L / 1.4404
- Cable material PVC
- Perm. Temperature max. elektronik up to 70°C
- Protection class IP68

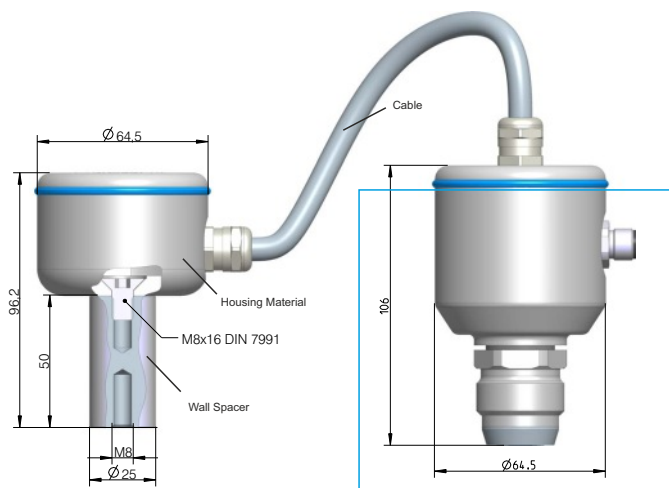

Example Sensor for mounting the DES e. g. SLI03, SDT03, STS...

### Order Code

DES	-			-	<b>B</b>	-	<b>A</b>	-	<b>X</b>	<b>X</b>
Length of connection cable										
2m Preference type		0	2							
5m Preference type		0	5							
10m Preference type		1	0							
Bar Spacer										
without					<b>A</b>					
Bar spacer 50mm with double sided M8 Thread (Standard)					<b>B</b>					
Parameterization Module										
without additional control display (Standard)						<b>A</b>				
with additional control display for units SLI/SDT03						<b>B</b>				
with additional control display for units STS01/02/03/04						<b>C</b>				
Accessories										
without (Standard)									<b>X</b>	<b>X</b>